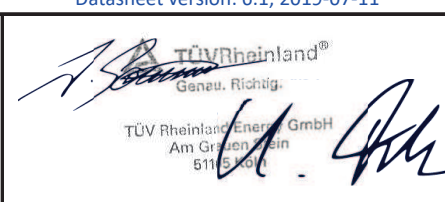


Annex to Solar Keymark Certificate					Licence Number		011-7S2980 R																																																										
					Date issued		2020-10-16																																																										
					Issued by		TÜV Rheinland Energy GmbH																																																										
Licence holder		Naked Energy Ltd			Country		United Kingdom																																																										
Brand (optional)					Web		http://www.nakedenergy.co.uk																																																										
Street, Number		Unit 72, Basepoint Business Centre			E-mail		commercial@nakedenergy.co.uk																																																										
Postcode, City		Metcalf Way, CRAWLEY, RH11 7XX			Tel		+44 1293 541449																																																										
Collector Type					Evacuated tubular collector																																																												
Collector name					Gross area (A_G)		Gross length		Gross width		Gross height																																																						
					m ²		mm		mm		mm																																																						
Virtu HOT					0.65		2 165		300		260																																																						
					W		W		W		W		W																																																				
					254		245		225		202																																																						
Power output per m ² gross area					390		377		346		310																																																						
					270		175																																																										
Performance parameters test method					Quasi dynamic																																																												
Performance parameters (related to A_G)					$\eta_{0, b}$	a1	a2	a3	a4	a5	a6	a7	a8	Kd																																																			
Units					-	W/(m ² K)	W/(m ² K ²)	J/(m ³ K)	-	J/(m ² K)	s/m	W/(m ² K ⁴)	W/(m ² K ⁴)	-																																																			
Test results					0.376	1.30	0.006	0.000	0.00	1 610	0.000	0.00	0.0E+00	1.25																																																			
Incidence angle modifier test method					Quasi dynamic - outdoor																																																												
Incidence angle modifier					Angle	10°	20°	30°	40°	50°	60°	70°	80°	90°																																																			
Transversal					$K_{\theta T, coll}$	1.47	1.82	1.89	1.96	2.08	2.07	1.99	1.00	0.00																																																			
Longitudinal					$K_{\theta L, coll}$	1.00	1.00	0.99	0.97	0.93	0.86	0.72	0.46	0.00																																																			
Heat transfer medium for testing					Water																																																												
Flow rate for testing (per gross area, A_G)					dm/dt	0.043	kg/(sm ²)																																																										
Maximum temperature difference during thermal performance test					$(\vartheta_m - \vartheta_a)_{max}$	80	K																																																										
Standard stagnation temperature ($G = 1000 \text{ W/m}^2$; $\vartheta_a = 30 \text{ °C}$)					ϑ_{stg}	240	°C																																																										
Maximum operating temperature					$\vartheta_{max, op}$	120	°C																																																										
Maximum operating pressure					$p_{max, op}$	600	kPa																																																										
Testing laboratory					TÜV Rheinland Energy GmbH			www.tuv.com/solar																																																									
Test report(s)					21249579.005			Dated		16.10.2020																																																							
Comments of testing laboratory					Datasheet version: 6.1, 2019-07-11																																																												
<p>Virtu HOT is showing an unsymmetric transversal incidence angle modifier and is mainly mounted horizontal in E-W direction (with absorber slope of 35°). These special conditions are considered on page 2. The full transversal IAM is given below:</p> <table border="1"> <tr> <td>-70</td><td>-65</td><td>-60</td><td>-55</td><td>-50</td><td>-45</td><td>-40</td><td>-35</td><td>-30</td><td>-25</td><td>-20</td><td>-15</td><td>-10</td><td>-5</td><td>0</td><td>5</td><td>10</td><td>15</td><td>20</td><td>25</td><td>30</td><td>35</td><td>40</td><td>45</td><td>50</td><td>55</td> </tr> <tr> <td>1.97</td><td>2.04</td><td>2.07</td><td>2.07</td><td>2.08</td><td>2.00</td><td>1.96</td><td>1.89</td><td>1.89</td><td>1.80</td><td>1.82</td><td>1.64</td><td>1.47</td><td>1.31</td><td>1.00</td><td>0.84</td><td>0.77</td><td>0.71</td><td>0.67</td><td>0.57</td><td>0.56</td><td>0.45</td><td>0.45</td><td>0.42</td><td>0.37</td><td>0.36</td> </tr> </table> <p>The interconnection between the single tubes is not part of considered gross area.</p>					-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	5	10	15	20	25	30	35	40	45	50	55	1.97	2.04	2.07	2.07	2.08	2.00	1.96	1.89	1.89	1.80	1.82	1.64	1.47	1.31	1.00	0.84	0.77	0.71	0.67	0.57	0.56	0.45	0.45	0.42	0.37	0.36									
-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	5	10	15	20	25	30	35	40	45	50	55																																								
1.97	2.04	2.07	2.07	2.08	2.00	1.96	1.89	1.89	1.80	1.82	1.64	1.47	1.31	1.00	0.84	0.77	0.71	0.67	0.57	0.56	0.45	0.45	0.42	0.37	0.36																																								
DIN CERTCO • Alboinstraße 56 • 12103 Berlin, Germany Tel: +49 30 7562-1131 • Fax: +49 30 7562-1141 • E-Mail: info@dincertco.de • www.dincertco.de																																																																	

Annex to Solar Keymark Certificate							Licence Number		011-7S2980 R				
Supplementary Information							Issued		2020-10-16				
Annual collector output in kWh/collector at mean fluid temperature ϑ_m													
Standard Locations		Athens			Davos			Stockholm			Würzburg		
Collector name	ϑ_m	25°C	50°C	75°C	25°C	50°C	75°C	25°C	50°C	75°C	25°C	50°C	75°C
Virtu HOT		508	417	325	470	383	303	344	272	208	354	277	207
Annual output per m ² gross area		782	641	501	723	590	466	528	418	320	544	426	319
Annual efficiency, η_a		44%	36%	28%	42%	34%	27%	45%	36%	27%	44%	34%	26%
Fixed or tracking collector		Fixed (slope = 25°)											
Annual irradiation on collector plane		1765 kWh/m ²			1714 kWh/m ²			1166 kWh/m ²			1244 kWh/m ²		
Mean annual ambient air temperature		18.5°C			3.2°C			7.5°C			9.0°C		
Collector orientation or tracking mode		South, 25°			South, 25°			South, 25°			South, 25°		
The collector is operated at constant temperature ϑ_m (mean of in- and outlet temperatures). The calculation of the annual collector performance is performed with the official Solar Keymark spreadsheet tool Scenocalc Ver. 6.1 (July 2019). A detailed description of the calculations is available at http://www.estif.org/solarkeymarknew/													
Additional Information													
Collector heat transfer medium										Water-Glycole			
The collector is deemed to be suitable for roof integration										No			
The collector was tested successfully under the following conditions:													
Climate class (A+, A, B or C)										A+		--	
G (W/m ²) >		1100		ϑ_a (°C) >		40		H _x (MJ/m ²) >		700			
Maximum tested positive load										2500		Pa	
Maximum tested negative load										2400		Pa	
Hail resistance using ice balls (diameter)										35		mm	
Additional collector attribute(s)													
<input type="checkbox"/> Using external power source(s) for normal operation					<input type="checkbox"/> Active or passive measure(s) for self-protection								
<input type="checkbox"/> Co-generating thermal and electrical power					<input checked="" type="checkbox"/> Façade collector(s)								
Energy Labelling Information							Additional Informative Technical Data						
		Reference Area, A _{sol} (m ²)			Hydraulic Designation Code			Aperture Area, A _a (m ²)					
Virtu HOT		0.65			1-VH-12S-A:6.4,4284-C:20.2,289			0.64					
Data required for CDR (EU) No 811/2013 - Reference Area A_{sol}													
Collector efficiency (η_{col})		33%			Zero-loss efficiency (η_0)			0.39		--			
Remark: Collector efficiency (η_{col}) is defined in CDR (EU) No 811/2013 as collector efficiency of the solar collector at a temperature difference between the solar collector and the surrounding air of 40 K and a global solar irradiance of 1000 W/m ² , expressed in % and rounded to the nearest integer. Deviating from the regulation η_{col} is based on reference area (A _{sol}) which is aperture area for values according to EN 12975-2 or gross area for ISO 9806:2017.		First-order coefficient (a ₁)			1.30		W/(m ² K)						
		Second-order coefficient (a ₂)			0.006		W/(m ² K ²)						
		Incidence angle modifier IAM (50°)			1.80		--						
Data required for CDR (EU) No 812/2013 - Reference Area A_{sol}													
Remark: The data given in this section are related to collector reference area (A _{sol}) which is aperture area for values according to EN 12975-2 or gross area for ISO 9806. Consistent data sets for either aperture or gross area can be used in calculations like in the regulation 811 and 812 and simulation programs.													
DIN CERTCO • Alboinstraße 56 • 12103 Berlin, Germany Tel: +49 30 7562-1131 • Fax: +49 30 7562-1141 • E-Mail: info@dincertco.de • www.dincertco.de													