

Summary of EN 12975 Test Results, annex to Solar KEYMARK Certificate	<b>Certificate No.</b>	<b>011-7S 2000 F</b>
	Date of issue	10-09-2012

Company	GREENoneTEC Solarindustrie GmbH	Country	Austria
Brand (optional)	GK3000 - FL - Series	Website	www.greenonetec.com
Street, number	Energieplatz 1, Industriepark St. Veit	E-mail	info@greenonetec.com
Postal Code	9300	Tel.	+43 (0)42 12 28 136 220
City	St. Veit	Fax	+43 (0)42 12 28 136 250

Collector Type (flat plate / evacuate tubular / un-glazed)	Flat plate collector
--	----------------------

Integration in the roof possible ?	No
------------------------------------	----

Collector name	Aperture area (A <sub>a</sub> ) [m <sup>2</sup> ]	Gross length [mm]	Gross width [mm]	Gross height [mm]	Gross area (A <sub>G</sub> ) [m <sup>2</sup> ]	Power output per collector unit G = 1000 W/m <sup>2</sup> T <sub>m</sub> -T <sub>a</sub> :				
						0 K	10 K	30 K	50 K	70 K
						[W]	[W]	[W]	[W]	[W]
GK3502 - FL	4.64	2 065	2 443	113	5.04	3 744	3 585	3 228	2 824	2 372
GK3102 - FL	9.28	2 065	4 871	113	10.06	7 489	7 169	6 457	5 648	4 743

Collector efficiency parameters related to aperture area (A <sub>a</sub> ) Type of fluid and flow rate see note 1	η <sub>0a</sub>	0.807	-
	a <sub>1a</sub>	3.317	W/(m <sup>2</sup> K)
	a <sub>2a</sub>	0.013	W/(m <sup>2</sup> K <sup>2</sup> )

Stagnation temperature - Weather conditions see note 2	t <sub>stg</sub>	199	°C
--	------------------	-----	----

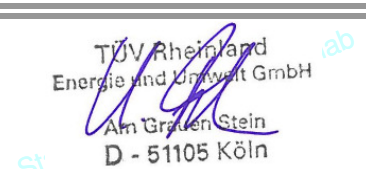
Effective thermal capacity	C <sub>eff</sub> = C/A <sub>a</sub>	7.31	kJ/(m <sup>2</sup> K)
----------------------------	-------------------------------------	------	-----------------------

Max. operation pressure - see note 3	p <sub>max</sub>	1000	kPa
--------------------------------------	------------------	------	-----

Incidence angle modifiers K <sub>θ</sub> (θ)	G <sub>DIF</sub> /G <sub>TOT</sub>		θ <sub>T</sub> / θ <sub>L</sub>	50°	10°	20°	30°	40°	60°	70°
	min	max	K <sub>θ</sub> (θ <sub>T</sub> )	0.90	1.00	0.99	0.97	0.95	0.82	0.66
	0.11	0.9	K <sub>θ</sub> (θ <sub>L</sub> )	0.90	1.00	0.99	0.97	0.95	0.82	0.66
G <sub>DIF</sub> /G <sub>TOT</sub> : min&max - while measuring					<i>Optional values</i>					

Testing Laboratory	TÜV Energie und Umwelt GmbH
Website	www.eco-tuv.de
Test report id. number	21219755_EN_P_GK3502_FL; 21219755_EN_R_GK3502
Date of test report	10-09-2012 (all)
Perf. test method	EN 12975-2 6.3 (outdoor)

Comments of testing laboratory :	

Note 1	Fluid	Water	Flow rate	0.020	kg/s per m <sup>2</sup>	 TÜV Rheinland Energie und Umwelt GmbH Am Grauen Stein D - 51105 Köln
Note 2	Irradiance, G <sub>s</sub> =1000 W/m <sup>2</sup> Ambient temperature, T <sub>a</sub> =30 °C					
Note 3	Given by manufacturer					



<b>Annual collector output based on EN 12975 Test Results, annex to Solar KEYMARK Certificate</b>	<b>Certificate No.</b>	<b>011-7S 2000 F</b>
	Issued	10-09-2012

Annual collector output kWh															
Collector name	Location and collector temperature (T <sub>m</sub> )														
	Athens			Davos			Stockholm			Würzburg					
	25°C	50°C	75°C	25°C	50°C	75°C	25°C	50°C	75°C	25°C	50°C	75°C			
GK3502 - FL	5 793	4 266	2 911	4 803	3 426	2 249	3 282	2 239	1 428	3 556	2 406	1 511			
GK3102 - FL	11 586	8 531	5 822	9 606	6 853	4 498	6 565	4 478	2 856	7 111	4 813	3 021			

Collector mounting: Fixed or tracking Fixed; slope = latitude - 15° (rounded to nearest 5°)

Overview of locations				
Location	Latitude °	G <sub>tot</sub> kWh/m <sup>2</sup>	T <sub>a</sub> °C	Collector orientation or tracking mode
Athens	38	1 765	18.5	South, 25°
Davos	47	1 714	3.2	South, 30°
Stockholm	59	1 166	7.5	South, 45°
Würzburg	50	1 244	9.0	South, 35°

G <sub>tot</sub>	Annual total irradiation on collector plane	kWh/m <sup>2</sup>
T <sub>a</sub>	Mean annual ambient air temperature	°C
T <sub>m</sub>	Constant collector operating temperature (mean of in- and outlet temperatures)	°C

Calculation of the annual collector performance is done by the official Solar Keymark spreadsheet tool. Hour by hour the collector output is calculated according to the efficiency parameters from the Keymark test using constant collector operating temperature (T<sub>m</sub>). Detailed description with all equations used is available from the Solar Keymark web site (direct link:<http://www.estif.org/solarkeymark/annexb1.php>)

<b>DIN CERTCO • Alboinstraße 56 • 12103 Berlin</b> Tel: +49 30 7562-1131 • Fax: +49 30 7562-1141 • E-Mail: info@dincertco.de • www.dincertco.de	Datasheet version: VERSION 3.5, 2012.01.13 Calculation program version: 3.07, October 2011 (SP)
--	--